

OMEGAS

SILENT CHECK VALVE

The Silent Check Valve is suitable for applications when silent operation and cost are of major concern. Its quick sturdy compression and spring return action combine to close the valve prior to flow reversal. This effectively eliminates the shock and water hammer normally associated with the sudden stoppage of a reverse flow.

To cope with the high fluid pressure typically associated with the local typical high-rise applications, the main body design is constructed with epoxy coated high-grade ductile iron. The interior moveable parts are made of stainless steel to ensure a corrosion-free and long lasting service.




SPECIFICATIONS

- Size: DN80-DN150
- Design Standard: BS5153
- Working Pressure: 10 bar
- Flange Drilling: BS4504 NP16

Nominal Internal Diameter DN	H
mm	mm
80	140
100	170
150	236

Maccanvas Hardware Trading & Engineering

OMEGAS

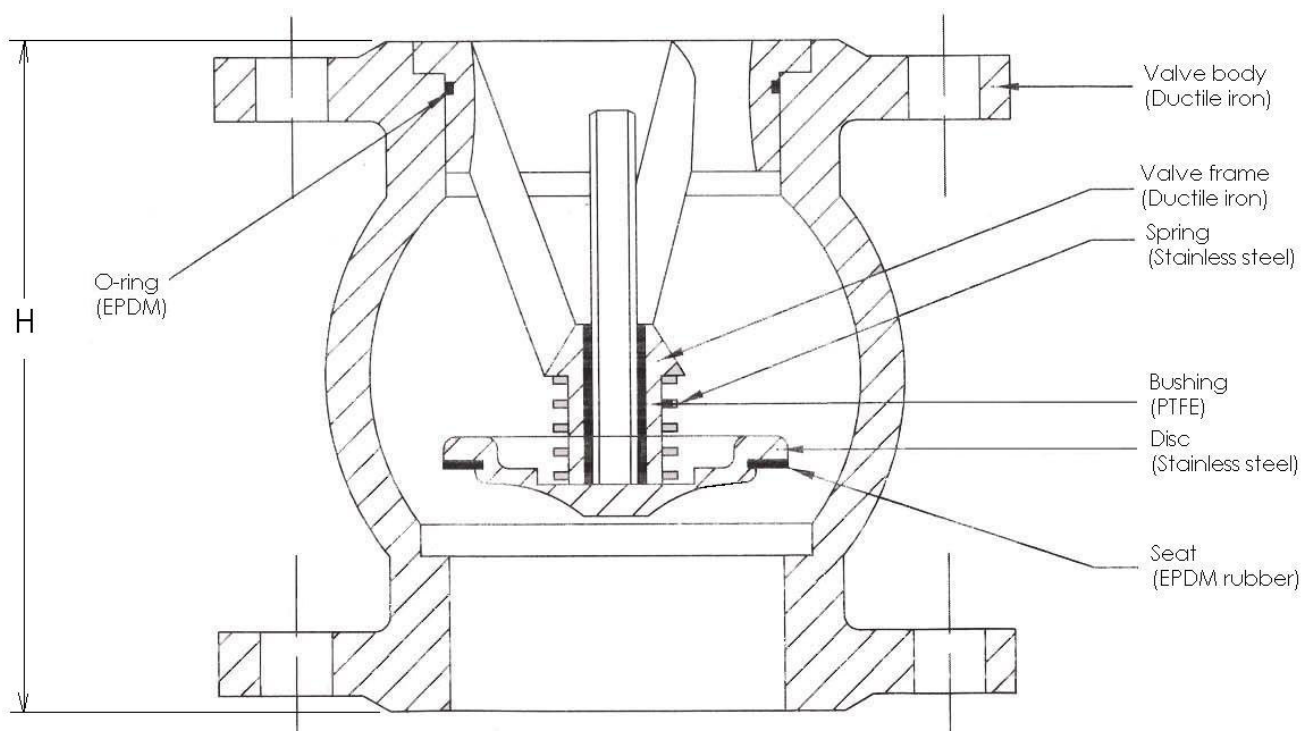

Maccanvas Hardware Trading & Engineering Pte Ltd

No.17 Defu Lane 7

Singapore 539340

Phone: +65 6281 2011

Fax : +65 6280 9349

Email: sales@maccanvas.com