

OMEGAS

GATE VALVE

Our gate valve is designed and built according to BS5163. Additional to the BS standard requirement, is the stringent application of Epoxy Powder coating, lab-tested and proven to protect the metal body from the environment corrosive elements. This ensures that the gate valve remains in service for a longer term.

Our gate valve is also equipped with Rubber Bonded Valve Wedge to ensure positive sealing with the minimal tightening effort.

The gate valve comes standard with the spindle cap. Hand-wheel is optional and is available upon request.

SPECIFICATIONS


- Size: DN80-DN300
- Design Standard: BS5163
- Face-to-Face: BS 4504
- Working Pressure: 10 bar
- Flange Drilling: NP16



Nominal Internal Diameter DN	H	H1	L
mm	mm	mm	mm
80	465	385	203
100	530	450	229
150	700	620	267
200	790	710	292
250	900	820	330
300	1000	920	356

Maccanvas Hardware Trading & Engineering

OMEGAS

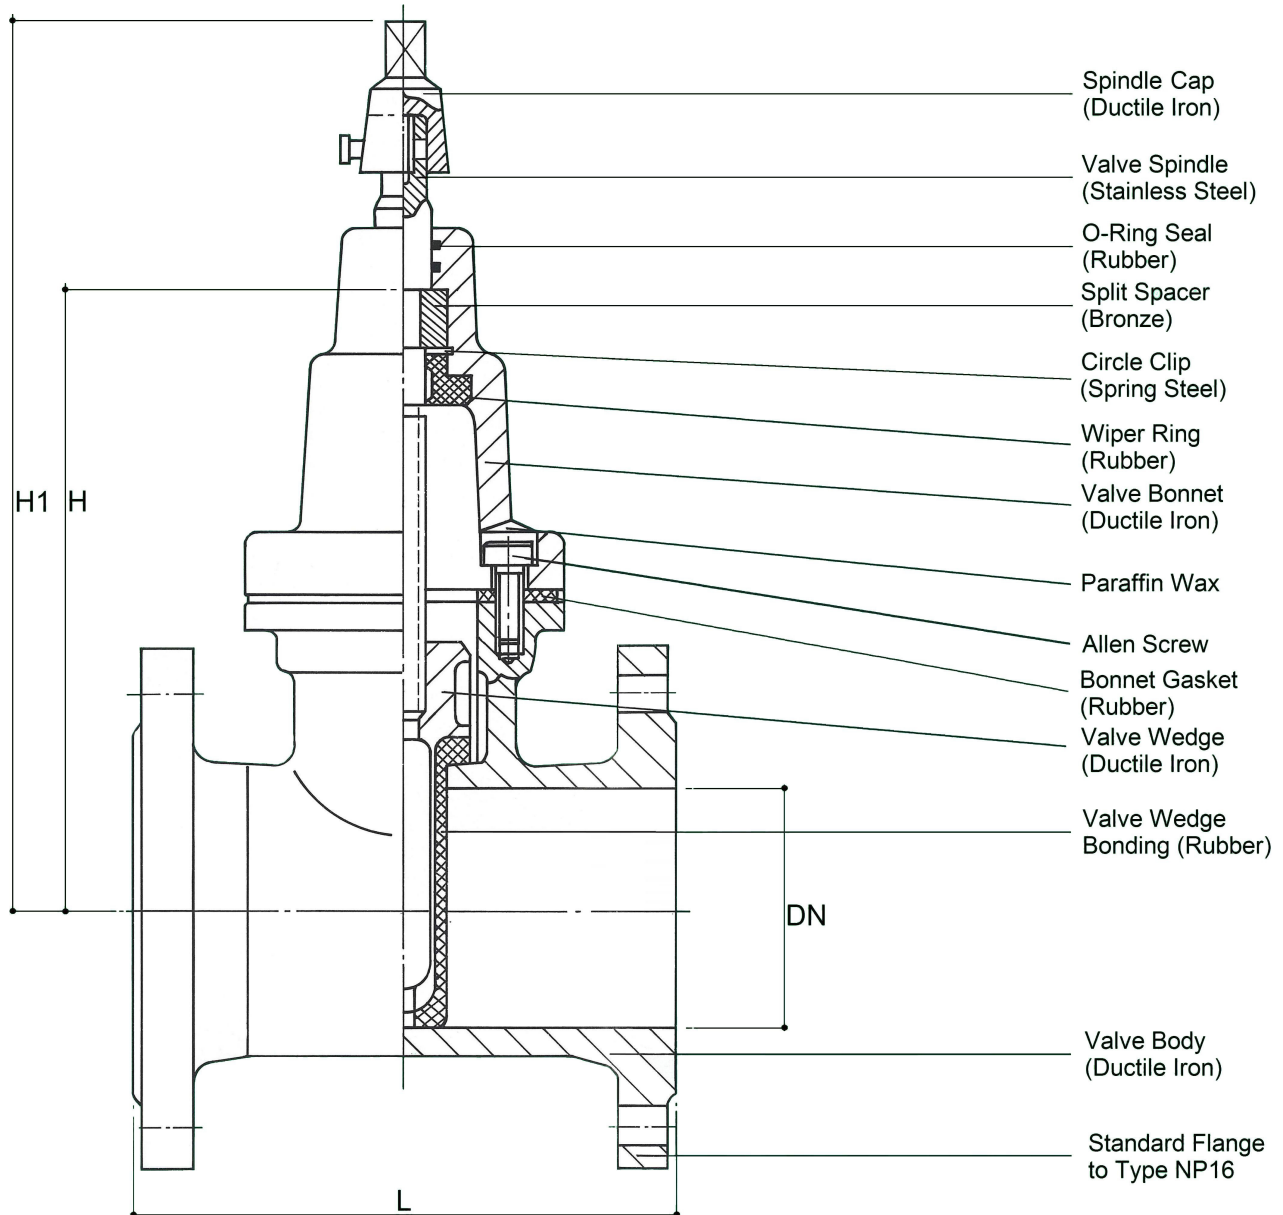

Maccanvas Hardware Trading & Engineering Pte Ltd

No.17 Defu Lane 7

Singapore 539340

Phone: +65 6281 2011

Fax : +65 6280 9349

Website: www.maccanvas.com